## WAVE-S-BF-APS, CE230V WB LP GF-EURO

BrewMETER® allows automatic programming of pulse routine

- Brew into 1.9L thermal carafe using the slide-out booster tray
- · Four-digit LED read-out for simple programming
- · SmartWAVE technology increases turbulence in the brew funnel
- Utilize the same LED read-out for brewer status (Ready, Heating, Brewing)
- Adjustable legs to accommodate up to 2.5L lever-action airpot and 1.9L thermal pitcher
- · Gourmet funnel accommodates larger throw weights
- New flexible 17-hole sprayhead maximizes uniformity of extraction and provides easy cleaning and deliming
- · Airpots are easily transported to remote meeting rooms, breakfast bars, etc
- Energy-saver mode reduces tank temperature during idle periods
- · Ensures coffee brew quality with cold brew lock out capability
- SplashGard® funnel deflects hot liquids away from the hand
- · Servers not included unless otherwise noted

Agency:

Faucet: Lower

**Additional Features** 

Silver Series

Height: 17.4" Width: 9.7" Depth: 19.0" (44.2cm) (24.6cm) (48.3cm)



Server(s) sold separately

**Specifications** 

Product #: 39900.0017

Finish: Stainless

Funnel: Gourmet Funnel

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
220-240	8.3-9.0	1800-2200	-	-	-	60°F (15.5°C)	1	2	50-60
*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.									

## **Plumbing Requirements**

### CAD Drawings

	U 1	0				
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 02/19/2020

the buyer to corresponding changes, improvements, additions or replace ment. For most current specifications and other info visit bunn.com.

Water Access: Plumbed

ements for previously	purchased	equipn

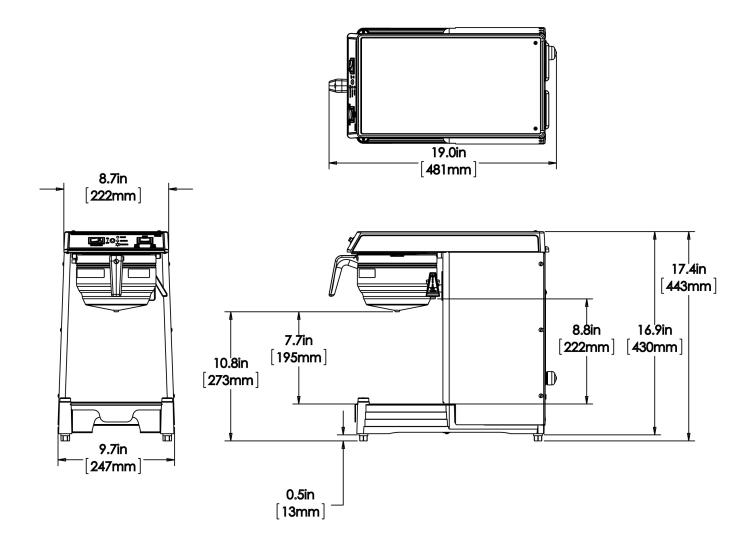

	Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume		
English	17.4 in.	9.7 in.	19.0 in.	19.5 in.	12.4 in.	19.5 in.	25.500 lbs	2.723 ft <sup>3</sup>		
Metric	44.2 cm	24.6 cm	48.3 cm	49.5 cm	31.4 cm	49.5 cm	11.567 kgs	0.077 m³		



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 02/19/2020

 For most current specifications and other info visit bunn.com.
 02/19/2020

# Related Products & Accessories: WAVE-S-BF-APS, CE230V WB LP GF-EURO (39900.0017)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last U the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 02/19, For most current specifications and other info visit bunn.com.

## Serving & Holding Options: WAVE-S-BF-APS, CE230V WB LP GF-EURO(39900.0017)





 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 02/19/2020

 For most current specifications and other info visit bunn.com.
 02/19/2020