H3EA Element SST CE EURO

Height: 20.4" Width: 8.3" Depth: 22.2" (51.8cm) (21.1cm) (56.4cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Digital thermostat provides consistent and accurate temperatures of 15.6-96C (Deg) (60-205F MAX)
- Contemporary, low-profile design for front-of-house and self-service settings
- Matching Blue LED dispense button
- Programmable "Energy Saver Mode" reduces operating costs during idle periods
- 196mm (7.75in) cup clearance accommodates a range of serving options for custom-crafted, hand pour coffees and teas

Agency:

EHE CE

Specifications

Product #: 45300.0002 Dispense: Portion Control
Water Access: Plumbed Dispense: Push Button

Finish: Stainless

Temp. Setting: 205°F (96.111°C)

Electrical & Capacity

				<i></i>						
Volts*		Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
	220-240	11.5-12.5	2500-3000	-	-	-	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


1 lamenig respansing							
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/4" BSPP	-				

CAD Drawings

Additional Features

2D	Revit	KLC
•		



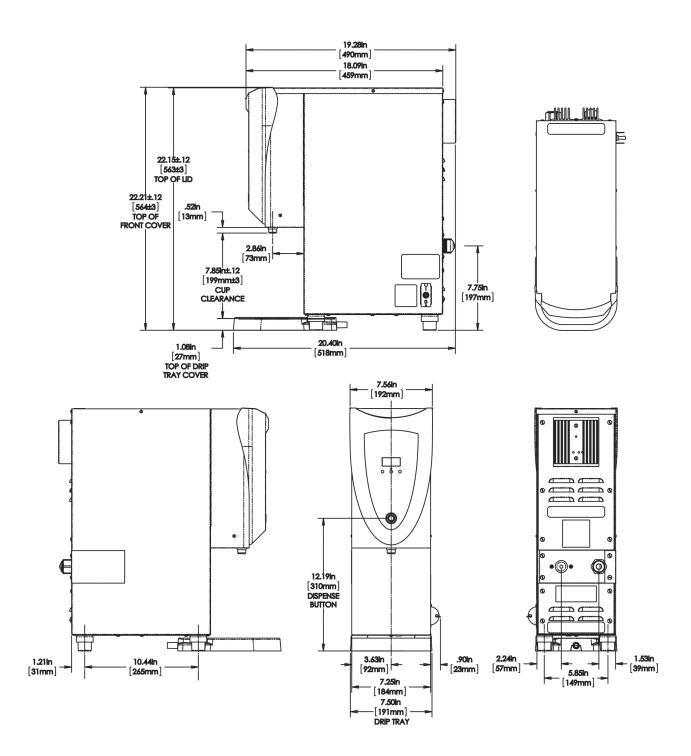

	Unit			Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	20.4 in.	8.3 in.	22.2 in.	32.3 in.	10.8 in.	21.9 in.	34.000 lbs	4.423 ft ³	
Metric	51.8 cm	21.1 cm	56.4 cm	82.1 cm	27.5 cm	55.6 cm	15.422 kgs	0.125 m³	



Related Products & Accessories: H3EA Element SST CE EURO(45300.0002)

Product #: 48885.0001

TRAY, DRIP H3E



Serving & Holding Options: H3EA Element SST CE EURO(45300.0002)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

